

ELECTRIC PALLET TRUCK

STARKE
LIFTMAXX

AC POWERED ELECTRIC WALKIE

AC



PT30L-MINI

Lithium Battery Powered Pallet Truck

Offers small turning radius, it is super light and easy to operate. Widely used in narrow aisle workshops, supermarkets & cargo containers.

Application:

Excellent for congested aisles and crowded loading docks.

Features

- Truck with low noise, no pollution, energy saving and meets environmental protection requirements.
- Outer cover is made of metal material, not easily damaged.
- Integrated rocker arm with high performance.
- Multi-function control handle.
- Lithium battery: 24V/25AH
- Floating balance wheels on both sides


Options

- Guided fork roller.
- Lithium battery: 24V/30AH, 24V/50AH, 24V/60AH

Starke Continuous Stability

Starke Continuous Stability reduces incidence of tipping while turning corners, or travelling on uneven surfaces. A fixed drive wheel supported by two spring loaded castors are in constant contact with the ground, supporting the stability of the lift truck. The Starke Continuous Stability feature offers better control over competitor fixed stop supports, which sit off the ground and wear quickly over time.

DIMENSION DRAWING:

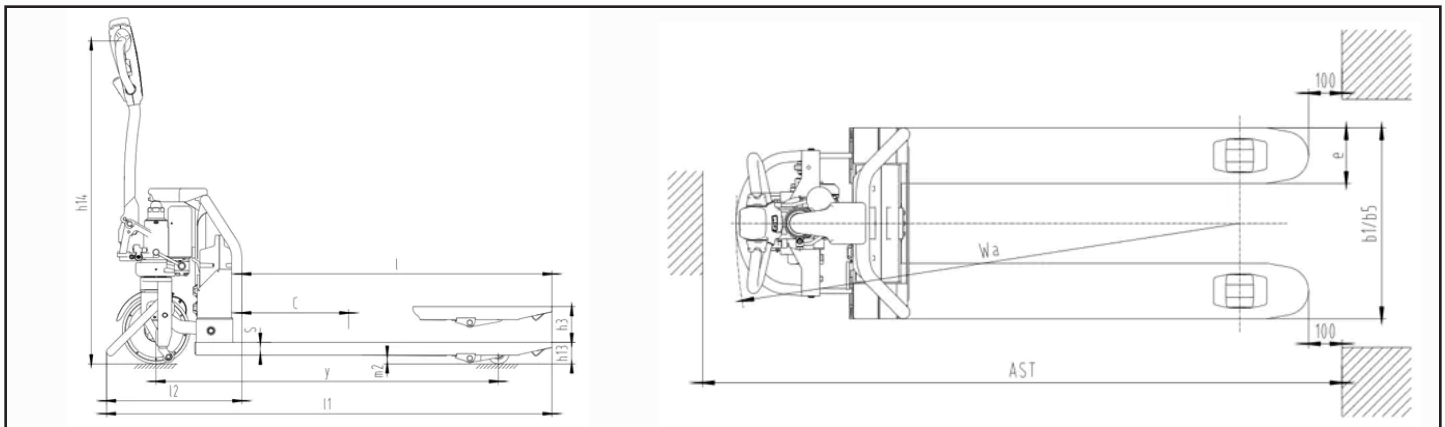

ELECTRIC PALLET TRUCK



AC POWERED ELECTRIC WALKIE

AC

General Information	Model		PT30L Mini
	Drive type		Electric
	Operator type		Pedestrian
	Rated Capacity	Q (lbs)	3000
	Load center distance	C (in)	23.6
	Distance from fork roller center to fork surface	x (in)	37.4/40.1
	Wheelbase	y(mm)	47/49.8
Weight	Service Weight	lbs	656
	Axle loading, laden front/rear	lbs	3231/4713
	Axle loading, unladen front/rear	kg	461.6/194.2
Tires/Chassis	Tires		PU
	Tire size, drive wheel	in	8.2x2.7
	Tire size, fork roller	in	3.1x3.6/3.1x2.7
	Wheels, number front/rear (x=drive wheel)		1x/2 (4)
	Tread, rear	b11(in)	15.3/20.4
Dimensions	Max. lift height	h3(in)	4.3
	Height drawbar in driving position min./max.	h14(in)	25.5/44.6
	Lowered fork height	h13(in)	3.1
	Overall length	l1(in)	60.8/63.5
	Length to face of forks	l2(in)	15.5
	Overall width	b1(in)	21.6/26.7
	Fork dimension	s/e/l(in)	2.7/6.2/45.2(48.0)
	Fork spread	b5(in)	21.6/26.7
	Ground clearance, center of wheelbase	m2(in)	1
	Aisle width for pallets 1000x1200 crossways	Ast(in)	84.6/87
	Aisle width for pallets 800 x 1200 lengthways	Ast(in)	79.3/80.9
	Turning radius	Wa(in)	52.9/55.7
Performance Data	Travel speed, laden/unladen	Km/h	4.3/4.5
	Lift speed, laden/unladen	m/s	0.025/0.03
	Max. gradeability, laden/unladen	%	5/20
	Service brake		Electric brake
Battery	Drive motor power	kW	0.75
	Lift motor power	kW	0.8
	Battery voltage/nominal capacity	V/Ah	24/25
Others	Controller type		DC brush
	Noise level at operators ear, according to DIN12053	dB(A)	70

Meets or exceeds ANSI B56.1 Standards. Specifications, features, and images are provided for reference only and may be subject to change without prior notice.

Rev 06/2024

